

# Panasonic<sup>®</sup> INSTRUCTION MANUAL

## Ultra High-Speed, High-Accuracy Laser Displacement Sensor Sensor Head HL-C235CE-W□

MJE-HLC235EW(02) No.0048-80V

Thank you very much for purchasing Panasonic products. Read this Instruction Manual carefully and thoroughly for the correct and optimum use of this product. Kindly keep this manual in a convenient place for quick reference.

### ⚠ WARNING

- This product is intended to detect the objects and does not have the control function to ensure safety such as accident prevention.  
Do not use the product as a sensing device to protect human body.
- Be careful not to directly watch or touch the direct laser beam or reflected laser beam.
- The product was developed and manufactured for industrial use.

### BEFORE USE

- Before using the product, check the sensor head model and contents of packing.
  - **Sensor head model**  
Check the model name of product at the top of sensor head.
  - **Packing**  
Check that all of the following components are included in the package.
    - 1 sensor head unit
    - 1 Instruction manual
    - Laser warning labels  
[JIS/IEC: 1 set, GB: 1 set (E type only)]

- This product satisfies the adaption of CE product by using in combination with controller and programmable display, which are subjected to CE. Please confirm that there is CE mark on connecting controller's label.

- **Contact for CE**  
Panasonic Marketing Europe GmbH Panasonic Testing Center  
Winsbergring 15, 22525 Hamburg, Germany

## 1 DESCRIPTION

- HL-C235BE-W□, HL-C235CE-W□ displacement sensor head achieves ultra high-speed and high-accurate measurement using linear image sensor as light receiving element to be used on equipment that require high-speed operation with high-accuracy.

## 2 CAUTIONS ON HANDLING LASER LIGHT

- For the purpose of preventing any injury which may occur to the user by the use of the laser product in advance, the following standards have been established by the IEC Standards, JIS Standards, GB Standards and FDA Standards.

IEC : IEC 60825-1-2007  
JIS : JIS C 6802-2011  
GB : GB 7247.1-2012  
FDA : PART 1040.10

These standards classifies laser products according to the level of hazard and provide the safety measures for respective classes.


- **Laser hazardous class**  
Classification according to IEC 60825-1-2007 (JIS C 6802-2005)

Class	Model	Description of hazardous evaluation
Class 3R	HL-C235CE-W HL-C235CE-WMK	Direct intrabeam viewing is hazardous, but risk is lower than for 3B.

- **WARNING label**

<HL-C235CE-W□>


### In Japanese / English / Korean

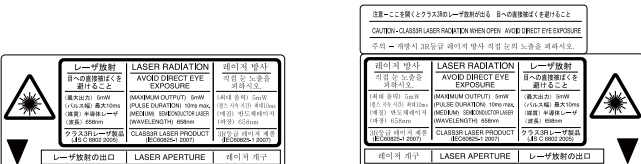


### In Chinese (E type only)



- **FDA certification label**



### <Label position>

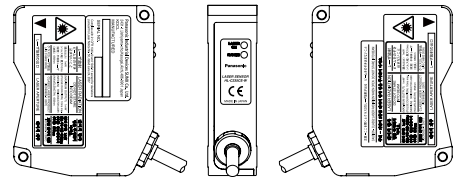

- Install the product so the laser beam comes higher or lower than eye level in order not to watch the beam directly during operation. Laser safety distance (Nominal Ocular Hazard Distance: NOHD) is approx. 1.4m. The laser beam must be terminated at the end of its path by a diffuse reflector or an absorber.
- Please contact our company if the system breaks down. It is not equipped with a function that stops laser radiation automatically during disassembling the sensor head. The users therefore may be exposed to laser beam in disassembling the sensor head.
- When this product is used in China, affix the Chinese warning label (accessory) on the label in the product.
- Do not use the system in the manner other than specified in this Instruction Manual.

## 3 SPECIFICATIONS

Model No.	HL-C235CE-W	HL-C235CE-WMK
Meas. method (Note 2)	Diffuse reflection	
Measurement center distance	350mm	350mm
Measurement range (Note 3)	±200mm	±200mm
Beam source	Red semiconductor laser Class 3R (JIS/IEC/GB), Class IIIa (FDA) (Note 4) Max output: 5mW, Emission Peak wavelength: 658nm	
Beam diameter (Note 5)	Approx. ø400µm	Approx. 400 × 6,500µm
Beam receiving element	Linear image sensor	
Resolution	8µm / average times: 256, 2µm / average times: 4,096	
Linearity	±0.04%F.S. (-200 to 0mm), ±0.08%F.S. (0 to +200mm) (F.S. = ±200mm)	
Temperature characteristics	0.01%F.S./°C	
Indicator	Laser emission	Green LED: Lights up during laser emission.
	Meas. range	Yellow LED: Near measurement center:ON, within measurement range:Blink, beyond the range:OFF
Protective structure	IP67 (except connector)	
Pollution degree	2	
Insulation resistance	20M ohms or more by 500V DC megger (between all the terminals and enclosure.)	
Dielectric withstand	Commercial Frequency	AC 500V for 1min. (between all the terminals and enclosure.)
	Impulse	±1,000V 1.2/50µs (between all the terminals and enclosure.)
Vibration resistance	Endurance: 10 to 55Hz (cycle: 1minute), Resistant amplitude of vibration: 1.5mm, in X, Y, and Z directions for 2 hours	
Shock resistance	196m/s <sup>2</sup> in X, Y, and Z directions for 3 times	
Ambient illuminance (Note 6)	3,000lx or less (illuminance at beam receiving surface using incandescent lamp)	
Ambient temperature	0 to +45°C (No dew condensation or icing allowed), At storage: -20 to +70°C	
Ambient humidity	35 to 85%RH At storage:35 to 85%RH	
Ambient Height	2,000m or less	
Material	Main unit case / cover aluminium: Die-cast, Front cover: Glass	
Cable length	0.5m	
Cable extension	Extendible to 30m long maximum using the optional extension cable.	
Weight	Approx. 300g including cable weight	
Applicable standards	Conformed to EMC Directive	

- Notes: 1) Measuring conditions are as follows unless otherwise specified; connection with controller, power voltage: 24V DC, ambient temperature: 20°C, sampling cycle: 40µs, average times:256, at measurement center distance, object substance: white ceramic., and digital measurement value.  
2) Use the external ND filter (optional) in case the amount of reflected beam is too large on Specular Reflection installation.  
3) The measurement range is limited between -70 and +200mm (in case the sampling cycle is 20µs), or between +100 and +200mm (in case the sampling cycle is 10µs).  
4) This is based on the FDA Standard, according to Laser Notice No. 50 of the FDA Standard.  
5) The figure shows the value at measurement center distance. It is determined by 1/e<sup>2</sup> (approximately 13.5%) of the center beam intensity. Due to leak light outside the specified area, the reflectance around the detecting point may be higher than at the point and this may affect the measurement value.  
6) The variation in ambient illuminance is ±0.08%F.S. or less.

## 4 EXPORT REGULATIONS BY JAPANESE GOVERNMENT

- Please follow the export control regulations required.  
HL-C235CE-W(MK) (E type) are not subject to export control regulations under the condition that they are used combined with the non-pertinent controller to export control specified by Foreign Exchange and Foreign Trade Law. When they are combined with the pertinent controller to export control, they are subject to the Law. In this case export admission by Japanese government is required before the product is to be exported or brought out of the country.

## 5 CAUTIONS

### Controller


- It does not work properly in case connected to the controller ver. 1.\*\*.
- For proper use, connect to the controller ver. 2.00 or later.

### Connection

- Turn off the power of controller before connecting or disconnecting the connectors.
- When connecting or disconnecting the connectors, be sure to hold the connector area not to apply extra force to the cable.
- Be careful not to touch terminals or to let foreign matter get in the connector after disconnecting connectors.
- Be careful not to apply force to around the connector of standard cable and extension cable. Do not bend the cables near connectors. Failure to do so causes disconnection of the cable.
- When moving the sensor head during operation, install it so the cable not bend during movement. Use replaceable extensions cable in case the cable needs bend.

### Wiring

- Do not run the sensor cable along (bundled in parallel) with other wirings. Keep it at least 100mm away from other wires. Run the cable so it is separate from high voltage and power circuit lines. If it is necessary to run the cable in parallel with them, shield it by running through a grounded electrical conduit.
- Install the product as far away as possible from noise source such as high-voltage lines, high-voltage device, power lines, power device, machines which generate a large starting and stopping surge, welding machines and inverter motor.
- Do not pull the cable using a force more than 29.4N when routing the cable with the sensor head and controller fixed. At least 20 mm is required from the cable connection to the bend. The bending radius must be 30 mm or more.
- Use only 1 extension cable for connection between one sensor head and a controller.



### Warming up time


- Allow at least 30 minutes of warming up after turning on the power to ensure the performance of the product.

### Environment

- The life of the semiconductor laser depends on the ambient temperature during use. When using the product near a heat source, take measures to lower the ambient temperature of the sensor head as possible. Mount the sensor on a device having good heat radiation because the sensor itself emits heat.
- Water, oil, or fingerprints on the emitter surface and receiver surface of sensor head reflects light. Dust and dirt on them block light. Keep them clean at all times. When cleaning these parts, wipe them off using a soft lint-free cloth or lens cleaning paper.
- Install the sensor head so ambient light such as sunlight or light with the same wavelength as laser beam should not enter the light receiver. If high accuracy is required, install a light shielding plate or the like on the sensor head.
- The controller and connectors are not structurally dustproof, waterproof, or corrosion-resistant. Do not use the product underwater or in the rain.
- Do not use the product in dusty places or that exposed to flammable or corrosive gases, droplet, direct sunlight, severe vibration or impact.

## 6 MEASUREMENT RANGE / INDICATOR


### Installation Mode: Diffuse

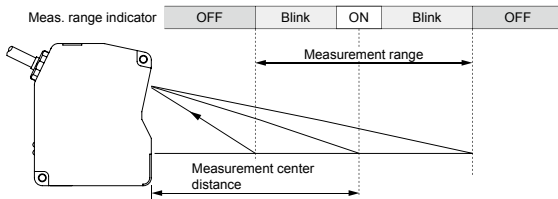


- The measurement range indicator at sampling cycle of 20µs or 10µs lights up at the center of limited measurement range.

## 7 MUTUAL INTERFERENCE AREA (Unit: mm)

- When installing 2 or more sensor heads side by side, mutual interference occurs if the laser spots from other sensor heads fall within the shaded areas in the right figure. Install sensor heads so the laser spots from other sensor heads fall outside the shaded areas.

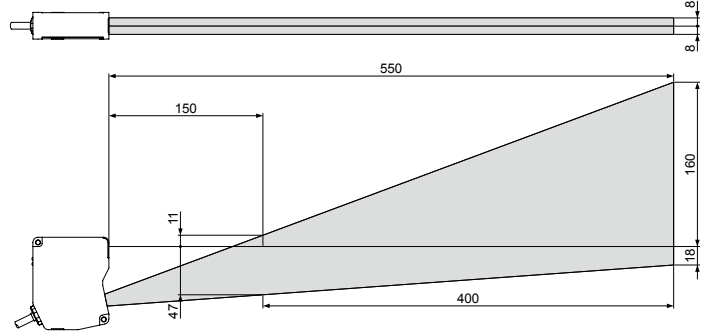


## 8 BEAM DIAMETER (Unit: mm)

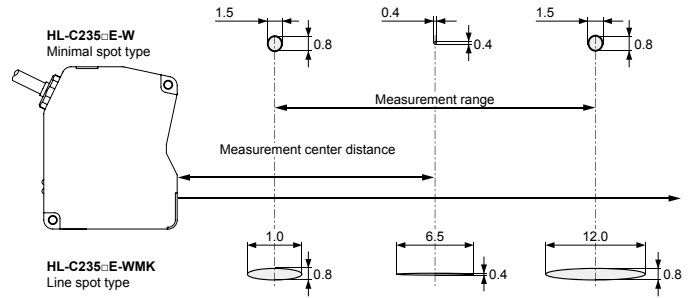

## 9 DIMENSIONS (Unit: mm)

### Installation Mode: Diffuse

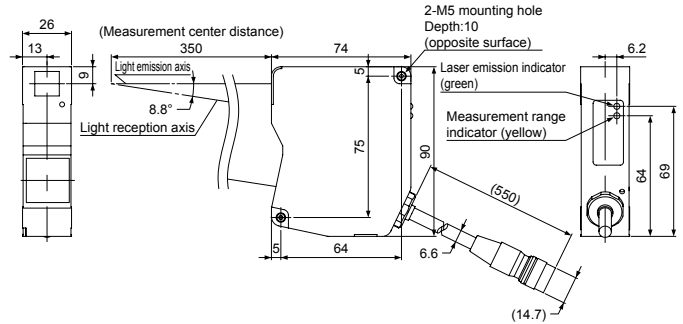

## 10 OPTION

- ND filter (product code: **HL-C2F01**) is optionally available to adjust the excessive received light intensity to an optimum level. This is useful when mounting the sensor head for specular reflection.

## Panasonic Industrial Devices SUNX Co., Ltd.

<http://panasonic.net/id/pidsx/global>

### Overseas Sales Division (Head Office)

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan  
Phone: +81-568-33-7861 FAX: +81-568-33-8591

For sales network, please visit our website.

PRINTED IN JAPAN

© Panasonic Industrial Devices SUNX Co., Ltd. 2015