



Leaflet – MFMCA0xx0EEL

Version 2.0
02.08.2024

Motor cable for MINAS LiQi, MSMD 50W- 1kW and MHMD 200W-750W, 200VAC, shielded, xm, usable with drag chain

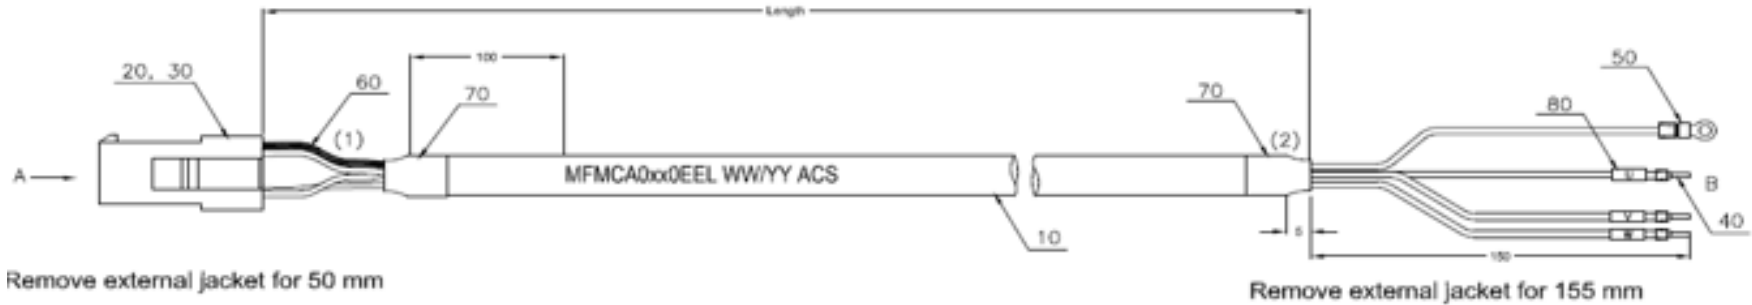

Note (1): Create a new wire using GND wire and a part of external shield
insulate with Shrink tube Pos.60

Note (2): Remove completely the external shield and insulate with Shrink tube Pos.70

(A) Motor Side		Cable (4x0,75)Sk PUR	(B) Driver Side	
Section	Pin	Connection diagram	Label	Color wire
0,75	1		U	U/1/L1
0,75	2		V	V/2/L2
0,75	3		W	W/3/L3
0,75	4		GND	
	(1)		(2)	Shield

Pos.	Item	Description	Qty
10	13-EBX19Q04P-A1	Nexans - Cable (4G0,75)5h PUR Orange UL	Length
20	172159-1	Tyco - Connector Mini Male N-Lock 4P/F	1
30	170362-1	Tyco - Contact Mini Male N-Lock (real 4000pcs)	4
40		Cembre - Females 0,75mm ² L=12mm	3
50		Cembre - Ring M4x1,5mm ²	1
60		Milon - Shrink Tube D.3,2x1,6 L=90mm	1
70		Milon - Shrink Tube D.6,4x3,2 L=30mm	2
80		Identification Ring UV/W	1
90		PEW Label	1
100		PEW Packing Bag	1
110		PEW Leaflet	1